




## 贴片保险丝(抗浪涌型) cRU<sup>®</sup>US

### SMD Fuse (High Inrush Current Withstand) 250V/125V/100V/72V/60V/32V

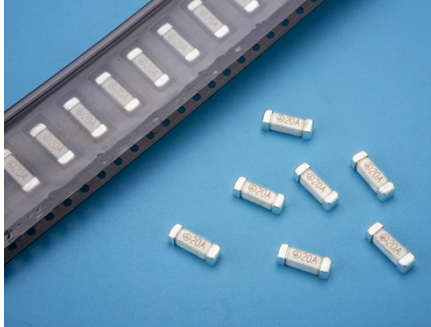

**测试标准:**  
Testing Standard:  
UL248-1 UL248-14


**额定分断能力:**  
Interrupting Rating:  
100 Ampere at 250V/125V AC(10A~60A)  
600 Amperes at 100V/72V/60V DC(10A~60A)  
1000 Amperes at 32V DC(10A~60A)

**工作温度:**  
Operating Temperature:  
-55°C ~ +125°C

**材料:**  
Materials:  
End cap:Ag plated brass  
Ceramic tube:ceramic

**焊接方法:**  
Soldering Method:  
Reflow soldering: 260°C, 10s max  
Manual soldering: 380°C, 3s max

**包装:**  
Packaging:  
Automaton taped 2000PCS per reel,  
20000PCS per carton



#### 电气特性: Electrical Characteristics

额定电流的% % of Ampere Rating	熔断时间 Opening Time
100%	4 hours Min.(大于4小时)
200%	60s Max.(小于60秒)
1000%	10ms Min.(大于10毫秒)

#### 目录编号: Catalog No.A:250V B:125V N:100V F:72V I:60V D:32V

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	熔化热能 <sup>2</sup> T Melting Integral (A <sup>2</sup> .S)	认证 Approvals
				● 表示已获认证 ● 表示认证中 cRU <sup>®</sup> US
32E2100A/B/N/F/I/D	10A	250V/125V/100V/72V/60V/32V	103	●
32E2150A/B/N/F/I/D	15A	250V/125V/100V/72V/60V/32V	150	●
32E2200A/B/N/F/I/D	20A	250V/125V/100V/72V/60V/32V	270	●
32E2250A/B/N/F/I/D	25A	250V/125V/100V/72V/60V/32V	415	●
32E2300A/B/N/F/I/D	30A	250V/125V/100V/72V/60V/32V	602	●
32E2350A/B/N/F/I/D	35A	250V/125V/100V/72V/60V/32V	810	●
32E2400A/B/N/F/I/D	40A	250V/125V/100V/72V/60V/32V	1035	●
32E2450A/B/N/F/I/D	45A	250V/125V/100V/72V/60V/32V	1301	●
32E2500A/B/N/F/I/D	50A	250V/125V/100V/72V/60V/32V	1680	●
32E2550A/B/N/F/I/D	55A	250V/125V/100V/72V/60V/32V	2012	●
32E2600A/B/N/F/I/D	60A	250V/125V/100V/72V/60V/32V	2416	●